

A photograph of a two-story house under construction. The exterior walls are covered in white protective sheathing with the word "GRACE" and "VYCOR" printed on it. The roof is covered in dark, textured sheathing. Scaffolding is visible around the house, and a worker is on the roof. The sky is clear and blue.

Protecting Homes and Reputations for 40+ Years

PHOTO CREDIT: SWEENOR BUILDERS

Complete Protection From Basement to Roof



PHOTO CREDIT: SWEENOR BUILDERS



TABLE OF CONTENTS

ROOFING UNDERLAYMENTS	3 - 16
Product Selector Guide.....	4
GRACE ULTRA™	5
GRACE ICE & WATER SHIELD® HT	7
GRACE ICE & WATER SHIELD®.....	9
GRACE SELECT™	11
TRI-FLEX® XT	13
TRI-FLEX® 15.....	15
WEATHER RESISTIVE BARRIERS & FLASHINGS	17 - 23
VYCOR® enV-S™	18
VYCOR® Pro.....	20
VYCOR® Plus.....	22
BASEMENT WATERPROOFING & VAPOR BARRIERS	24 - 28
BITUTHENE®	25
FLORPRUFE®.....	27

Roofing

Underlayments

The original roofing underlayments since 1978

- Product Selection Guide 4
- GRACE ULTRA™** 5
- GRACE ICE & WATER SHIELD® HT** 7
- GRACE ICE & WATER SHIELD®** 9
- GRACE SELECT™** 11
- TRI-FLEX® XT** 13
- TRI-FLEX® 15** 15



Product Selection Guide

Self-Adhered Smooth Surface Underlayments

PRODUCT	KEY BENEFITS	EXPOSURE	SIZE
GRACE ICE & WATER SHIELD® The Original, Best in Class Underlayment	<ul style="list-style-type: none"> • STRONG ADHESION TO THE ROOF DECK: Ensures watertight seal • HIGH QUALITY SEAL AROUND ROOFING FASTENERS: Delivers best in class roof leak protection • FORMS SUPERIOR LAPS: Provides watertight installation with NO special treatment of the laps • RIPCORD®- SPLIT RELEASE ON DEMAND: Makes it easier to waterproof detail areas such as valleys, chimneys and roof to wall transitions 	90 days	108 SF, 200 SF, 225 SF Rolls
GRACE ICE & WATER SHIELD® HT Meets the Challenges Inherent in Metal Roofs	<ul style="list-style-type: none"> • TEMPERATURE RESISTANCE UP TO 260 °F: Perfect option for high temperature roof designs such as metal roofs • 120 DAY EXPOSURE: Membrane delivers consistent performance over long, unpredictable construction cycles • High Quality Seal Around Fasteners: Premium roof leak protection • STRONG ADHESION: Ensures watertight seal • STRONG LAP STRENGTH: Minimizes chances of leaks due to gaps 	120 days	200 SF, 225 SF Roll
GRACE ULTRA™ Designed for Extreme Temperature Roof Assemblies	<ul style="list-style-type: none"> • HEAT RESISTANCE UP TO 300 °F: 100% butyl adhesive is ideal for use in elevated temperatures, for copper, zinc, and COR-TEN® roofs, or any application where superior heat resistance is required • SUPERIOR PROTECTION FOR EXPENSIVE METAL ROOFS: Protect your clients' high end roof coverings with the GRACE ULTRA™ unique solution • MEMBRANE BONDS FIRMLY TO ROOF DECK AND FORMS HIGH QUALITY LAPS: Ensures watertight seal and premium leak protection • COMPATIBLE WITH ROOFING MATERIALS: Provides watertight transition between low slope and steep slope roofs 	120 days	198 SF Rolls
GRACE SELECT™ A Better Alternative to Granulars	<p>COMPARED TO GRANULARS:</p> <ul style="list-style-type: none"> • LIGHT WEIGHT: Great performance with minimal weight • SMOOTH SURFACE PROVIDES BETTER LAP ADHESION: Better protection against leaks. Strong adhesion in low temp performance • RE-ROOFABLE: Shingles can be easily removed from existing GRACE SELECT™ underlayment during re-roofing • HIGH ADHESIVE CONTENT: Premium adhesive offers a stronger defense against weather and self-seals around nails • PROPRIETARY FILM SURFACE: Superior foot traction without loose granules; scuff free surface 	90 days	195 SF Rolls

Mechanically Attached Synthetic Underlayments

TRI-FLEX® 15 Roofing Underlayments Overcomes Deficiencies of #15 FELT	<p>COMPARED TO #15 FELT:</p> <ul style="list-style-type: none"> • STRONGER (10 TIMES): Withstands higher wind conditions • LIGHTER WEIGHT: Fast and easy installation • MORE COVERAGE PER ROLL (2.3 TIMES): Increased efficiency • SLIP RESISTANT SURFACE: Provides superior foot traction • 100% RECYCLABLE: Contributes to sustainability and LEED 	30 days	10 Square Rolls
TRI-FLEX® XT Overcomes Deficiencies of #30 FELT	<p>COMPARED TO #30 FELT:</p> <ul style="list-style-type: none"> • MORE COVERAGE PER ROLL (5 TIMES): Increased efficiency • DURABLE: Can be left exposed up to 6 months • STRONGER (20 TIMES): Can withstand higher wind conditions • LIGHTER WEIGHT: Fast and easy installation • SLIP RESISTANT SURFACE: Superior foot traction 	180 days	10 Square Rolls

GRACE ULTRA™

SELF-ADHERED ROOFING UNDERLAYMENT

DESIGNED FOR EXTREME TEMPERATURE ROOF ASSEMBLIES



Ideal for
copper,
zinc, and
COR-TEN®
Roofs

Excellent for
high altitude
and desert
climates

From the
makers of
GRACE ICE
& WATER
SHIELD®,
the name
roofing
professionals
trust

GRACE ULTRA™ self-adhered, smooth surface roofing underlayment features a 100% butyl adhesive formula. **GRACE ULTRA™** roofing underlayment delivers best in-class water protection in applications, where withstanding the most extreme in-service temperatures for extended periods of time is required.

"GCP underlayments are far superior to any product we have used in the past. When applied properly they perform flawlessly. They adhere very well to roof decks and seal each and every nail penetration unlike many other products we have used in the past."

—Kevin Menezes of Triple M Contracting Inc.



WHY GRACE ULTRA™ ROOFING UNDERLAYMENT?

100% BUTYL ADHESIVE

Ideal for use in elevated temperatures, for copper, zinc and COR-TEN® roofs, or any application where superior heat resistance is required
Peace of mind against extreme conditions

SUPERIOR PROTECTION FOR EXPENSIVE METAL ROOFS

Protect your clients' high end roof coverings with GRACE ULTRA™ roofing underlayment's unique solution
High quality protection for high quality jobs

MEMBRANE BONDS FIRMLY TO ROOF DECK AND FORMS HIGH QUALITY LAPS

Ensures watertight seal and premium leak protection
Provides confidence that your client's roof won't leak

COMPATIBLE WITH EPDM AND TPO ROOFING MATERIALS

Provides watertight transition between low slope & steep slope roofs
Don't compromise waterproof integrity due to material incompatibility



A unique waterproofing solution that matches the long term durability of copper roofs



Roll Size	34 in. x 70 ft.
Roll Coverage	198 ft ²
Temperature Resistance	300 °F

GRACE ICE & WATER SHIELD® HT

SELF-ADHERED ROOFING UNDERLAYMENT

MEETS THE CHALLENGES INHERENT IN METAL ROOFS



Thermal stability for superior performance under the most demanding conditions

Protects roofs against wind driven rain and ice dams

The design flexibility you need, the waterproofing performance you trust

GRACE ICE & WATER SHIELD® HT fully-adhered, smooth surface roofing underlayment is specifically designed to meet the challenges inherent in metal roof assemblies. When your roofing underlayment needs to perform at high temperatures, insist on **GRACE** ICE & WATER SHIELD® HT.

"GCP underlayments are far superior to any products we have used in the past. When applied properly they perform flawlessly. They adhere very well to roof decks and seal each and every nail penetration unlike many other products we have used in the past. We use GRACE ICE & WATER SHIELD® HT under all of our slate roof applications. Since 1989, we have been using GCP underlayments, and we are highly satisfied with their products. In the event of a roofing failure (snow and ice, hurricane, tree damage, etc.) we feel confident having GCP underlayments on our clients' homes and would trust no other product. Do it right the first time."

— Kevin Menezes, Triple M Contracting Inc.



WHY GRACE ICE & WATER SHIELD® HT?

HIGH THERMAL STABILITY

Suitable for high temperature roof designs including most metal roofs and insulated assemblies

Premium waterproofing protection

HIGH QUALITY SEAL AROUND FASTENERS

Premium roof leak protection

Peace of mind against costly call backs

SUPERIOR ADHESION TO THE ROOF DECK & STRONG LAP STRENGTH

Helps ensure watertight protection

Provides confidence that your client's roof won't leak

120 DAY EXPOSURE

Membrane delivers consistent performance over long, unpredictable construction cycles

Flexible construction schedules



FROM THE
MAKERS OF
**GRACE ICE &
WATER SHIELD®**

Premium
protection you
expect with the
thermal stability
metal roofs
require



Roll Coverage	225 ft ² 200 ft ²
---------------	--

Exposure	120 Days
----------	----------

Temp. Resistance	260°F
------------------	-------

GRACE ICE & WATER SHIELD®

SELF-ADHERED ROOFING UNDERLAYMENT

THE ORIGINAL, BEST IN CLASS ROOF UNDERLAYMENT



Best in class protection against wind driven rain and ice dams

Highest quality seal around fasteners

The name contractors trust the most to protect their reputations

GRACE ICE & WATER SHIELD® fully-adhered smooth surface roofing underlayment provides best in class roof leak protection. Its proprietary and time tested rubberized asphalt formulation has been proven to form a watertight bond with the roof deck and to seal around fasteners used to attach roof coverings. When it comes to roof protection, insist on the original – **GRACE ICE & WATER SHIELD®** roofing underlayment.

“GRACE ICE & WATER SHIELD® is the brand that I have trusted the most over the last 19 years when it comes to roofing underlayments. I rely on its superior ability to protect the most vulnerable roof details from ice dams and wind driven rains.”

— Mark Cahill, President of Cahill Roofing Inc.



WHY GRACE ICE & WATER SHIELD®?

HIGHEST QUALITY SEAL AROUND ROOFING FASTENERS

Delivers best in class roof leak protection

Provides confidence that your client's roof won't leak

BEST ADHESION TO THE ROOF DECK

Helps ensure watertight seal

Prevents costly leaks caused by ice dams and wind-driven rain

FORMS SUPERIOR LAPS

Provides watertight installation with NO special treatment of the laps

Premium leak protection without additional labor time

RIPCORD® – SPLIT RELEASE ON DEMAND

Makes it easier to waterproof detail areas such as valleys, chimneys, roof to wall transitions

Robust protection of the roof's most vulnerable areas



LONGEST PERFORMANCE HISTORY

With over 44 years of performance history, **GRACE ICE & WATER SHIELD®** offers the highest confidence for the life of the roof.

Roll Coverage	225 ft ²
	200 ft ²
	108 ft ²

Exposure	90 Days
----------	---------



GRACE SELECT™

SELF-ADHERED ROOFING UNDERLAYMENT

THE PERFORMANCE CHOICE TO GRANULARS



Offers better
adhesion to
roof deck

Lighter
weight for
easier install

Proven track
record in
marketplace

GRACE SELECT™ smooth surface roofing underlayment is composed of a rubberized asphalt adhesive laminated to a strong slip-resistant film. This lightweight product makes it faster and easier to install than granulars while meeting or exceeding industry standards for roofing underlayments.





*"After using several brands of granular underlayments over the years, I am glad I discovered **GRACE SELECT™**. **GRACE SELECT™** is definitely better than any granular underlayments out there and does a much better job. Since it is lightweight, it is easier to work with. Also, it is made by GCP, which gives me peace of mind that my clients' roofs are well protected. Overall, I am very satisfied with **GRACE SELECT™**."*

— Mario Sousa, Caliber Construction



WHY GRACE SELECT™ ROOFING UNDERLAYMENT?

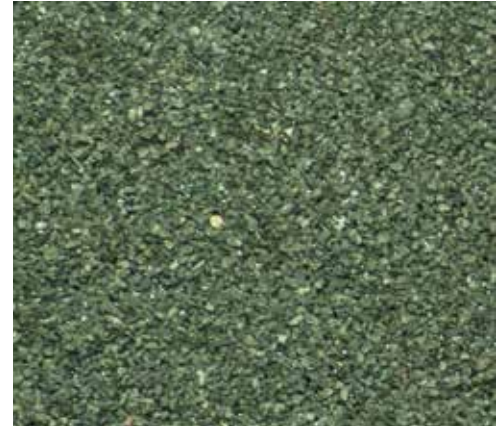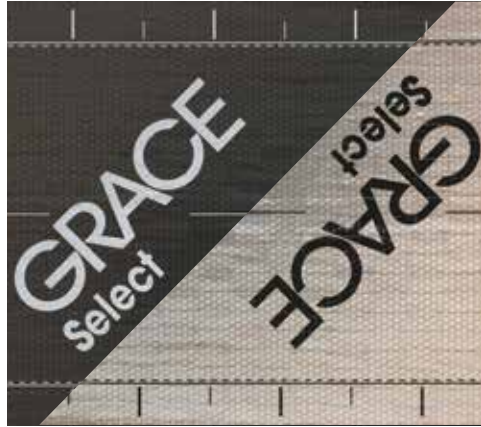

GRACE SELECT™

GRANULARS

Developed by the recognized leader in self-adhered roofing underlayments and the manufacturer of **GRACE ICE & WATER SHIELD®**

Roll Weight	32 lbs.
Roll Size	195 ft ²
Roll Length	65 ft.
Roll Width	36 in.

LIGHT WEIGHT

Great performance with minimal weight
Fast and easy installation

DOUBLE WEIGHT

Difficult to handle during installation

SMOOTH SURFACE PROVIDES BETTER LAP ADHESION

Better protection against leaks. Strong adhesion in low temp performance
Job done well the first time

GRANULAR SURFACE MAY INHIBIT WATERTIGHT LAPS

May require special treatment of the laps

RE-ROOFABLE

Shingles can be easily removed from existing **GRACE SELECT™** underlayment during re-roofing
Easier & less costly retrofit applications

NOT RE-ROOFABLE

Shingles cannot be easily removed from the existing granular underlayment when re-roofing; more difficult and costly retrofit jobs

HIGH ADHESIVE CONTENT

Premium adhesive offers a stronger defense against weather and self-seals around nails.
Protection against costly call backs

LOW ADHESIVE CONTENT

Less rubberized asphalt adhesive compared to **GRACE SELECT™**

PROPRIETARY FILM SURFACE

Superior foot traction without loose granules; scuff free surface
Safe & Clean Installation

GRANULAR SURFACE

Loose granules may cause slip hazards; may be vulnerable to scuffing in hot weather

TRI-FLEX[®] XT

SYNTHETIC ROOFING UNDERLAYMENT

PREMIUM PERFORMANCE SYNTHETIC UNDERLAYMENT



Robust benefits compared to #30 Felt

High performance water-shedding underlayment

From the makers of GRACE ICE & WATER SHIELD[®], the name roofing professionals trust

TRI-FLEX[®] XT is a mechanically-attached, synthetic roofing underlayment designed to overcome the shortcomings of traditional #30 roofing felt, while delivering advanced benefits that save the contractor time & labor. Triflex[®] XT features an improved slip resistance coating on the membrane, providing superior foot traction and a safer walking surface.

"I install TRI-FLEX[®] synthetic underlayments whenever I install GRACE ICE & WATER SHIELD[®]. I found that TRI-FLEX[®] works better than any other synthetic roofing underlayment I've used. The fact that it is a wrinkle free, tear resistant product makes it easy to apply to the deck. I install roofs in the North Shore and South Shore areas of Boston and need materials that can withstand the inclement weather."

— TJ Livingstone, Land Line Construction Inc.



WHY TRI-FLEX® XT ROOFING UNDERLAYMENT?



TRI-FLEX® XT

#15 FELT

20 TIMES STRONGER THAN FELT

TRI-FLEX® XT roofing underlayment can withstand high wind conditions, providing peace of mind against costly reworks.

IMPROVED SLIP RESISTANT SURFACE

New coating provides superior foot traction
Safer installation

LESS SLIP RESISTANT

Can be slippery when wet

MORE COVERAGE PER ROLL (5 TIMES)

Increased efficiency
Labor savings

LESS COVERAGE

Requires more rolls to cover the same amount of area

DURABLE

Long exposure time allows temporary "dry in" of structures for up to 6 months
Flexible construction schedules

LESS DURABLE

Exposure degrades quality of felt

LIGHTER WEIGHT

Fast and easy installation
Saves time & labor costs

DOUBLE WEIGHT

Difficult to handle during installation

Roll Coverage 10 SQ

Roll Weight 28 lbs.

Exposure 180 days

100% RECYCLABLE

Contributes to sustainability & LEED

CANNOT BE RECYCLED

TRI-FLEX® 15

SYNTHETIC ROOFING UNDERLAYMENT

ECONOMICAL SYNTHETIC ALTERNATIVE TO #15 FELT



Superior performance compared to #15 felt

Resists blow-offs & tears in windy conditions

From the makers of GRACE ICE & WATER SHIELD®, the name roofing professionals trust

TRI-FLEX® 15 is a mechanically-attached, synthetic roofing underlayment. It is designed to overcome the shortcomings of #15 felt while delivering advanced benefits that save the contractor time & labor.

"I install TRI-FLEX® synthetic underlayments whenever I install GRACE ICE & WATER SHIELD®. I found that Tri-Flex® works better than any other synthetic roofing underlayment I've used. The fact that it is a wrinkle free, tear resistant product makes it easy to apply to the deck. I install roofs in the North Shore and South Shore areas of Boston and need materials that can withstand the inclement weather."

— TJ Livingstone, Land Line Construction Inc.



WHY TRI-FLEX® 15 ROOFING UNDERLAYMENT?



TRI-FLEX® 15

#15 FELT

LIGHT WEIGHT

TRI-FLEX® 15 synthetic underlayment weighs half of #15 felt, enabling fast and easy installation

Roll Coverage 10 SQ

Roll Weight 20 lbs.

STRONGER (10 TIMES)

Withstands higher wind conditions
Protection against costly repairs

MORE COVERAGE PER ROLL (2.3TIMES)

Increased efficiency
Labor savings

SLIP RESISTANT SURFACE

Provides superior foot traction
Safer installation

LIGHTER WEIGHT

Fast and easy installation
Saves time & labor costs

100% RECYCLABLE

Contributes to sustainability & LEED

VULNERABLE TO WIND

Higher chance for rework

LESS COVERAGE

Requires more rolls to cover the same amount of area

LESS SLIP RESISTANT

Can be slippery when wet

DOUBLE WEIGHT


Difficult to handle during installation

CANNOT BE RECYCLED

Weather Resistive Barriers & Flashings

Premium protection. Superior energy efficiency.
Serious Savings.

VYCOR® enV-S™ 18
VYCOR® Pro 22
VYCOR® Plus 20

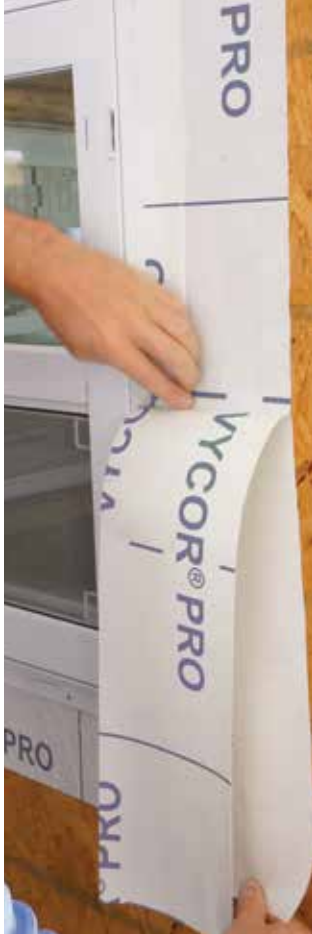

VYCOR® enV-S™

WEATHER RESISTIVE BARRIER

BETTER WEATHER PROTECTION THAN HOUSEWRAPS



PHOTO CREDIT: SWEENOR BUILDERS

Protection against water and air intrusion that cannot be matched by mechanically-attached housewraps

Resists blow-offs & tears in windy conditions

Helps achieve up to 56% annual energy savings*

*Per "Testing of VYCOR® enV-S™ Weather Resistive Barrier", by Oak Ridge National Laboratory

VYCOR® enV-S™ sheet-applied, self-adhered weather resistive barrier provides exceptional protection against water damage and air infiltration. It helps preserve the home's structural integrity and contributes to improved energy efficiency.

"We installed VYCOR® enV-S™ and were extremely pleased with its air infiltration performance compared to traditional housewraps. Our energy tester noted that this was the lowest test rate they had performed in our area. With VYCOR® enV-S™ we are well on our way to achieving our energy efficiency goal of 1ACH leakage."

— TJ Livingstone, Land Line Construction Inc.



WHY VYCOR® enV-S™ WEATHER RESISTIVE BARRIER?

VYCOR® enV-S™ is fully-adhered

FORMS CONTINUOUS BARRIER AGAINST WATER AND AIR LEAKAGE, SEALING ALL THE CRITICAL ENTRY POINTS

*Differentiate yourself by offering clients premium protection against water damage and helping them lower their utility bills by up to 56%**

INSTALLATION DOES NOT REQUIRE MECHANICAL FASTENERS OR TAPING OF SEAMS

Provides peace of mind during installation; no worrying about leaks caused by improperly installed "details"

STRONG ADHESION TO SUBSTRATE ALLOWS THE SHEET TO WITHSTAND WEATHER CONDITIONS DURING THE CONSTRUCTION PERIOD

Avoid costly reworks due to tears & blow-offs, which are typical for housewraps

PROFESSIONAL, HIGH QUALITY APPEARANCE ON THE HOUSE DURING THE EXPOSURE PERIOD

Quality products for quality builders

*Data is based on the Oak Ridge National Laboratory (ORNL) evaluation of the annual energy savings potential a homeowner can achieve, when using VYCOR® enV-S™ weather resistive barrier compared to a leading housewrap brand.



COMPLETE WEATHER PROTECTION

Robust weatherization system when combined with VYCOR® flashings

Roll Size 40 in. x 120 ft.

Roll Coverage 400 ft²

Exposure 90 days



VYCOR[®] Plus

WINDOW AND DOOR FLASHING

PREMIUM WATER PROTECTION FOR WINDOWS



Protects vulnerable details from moisture penetration

Limits air leakage around windows and doors

Forms a water and air seal with building materials

VYCOR[®] Plus is a high performance self-adhered flashing, that provides premium protection against water infiltration in critical details such as windows and doors. When properly installed, **VYCOR[®] Plus** flashing reduces the risk of mold and rot development, and contributes to energy efficiency.

*"I've been in the building industry for over 30 years and have never received a call back on leaking windows after I started using **VYCOR[®] Plus** flashing tape. Easy to install and the peace of mind of knowing that if I do get a callback, it is not because of water leaking from the window flashing. I was the Superintendent on a project where we built 47 condos on the water in Avalon, NJ. Even after hurricane Sandy, we didn't get a call back on water leaking from around the windows. Great product and highly recommended."*

— Jerry Giles, Ehret Construction



WHY VYCOR® Plus FLASHING TAPE?

SUPERIOR ADHESION TO SUBSTRATE

Forms strong waterproof bond

Protect clients' walls against mold, mildew and rot

SEALS AROUND FASTENERS

Prevents water penetration to the substrate

Give clients peace of mind with premium protection

FORMS SUPERIOR LAPS

Ensures strong laps even at seams in the flashing

Another defense against moisture intrusion

RIPCORD® – AND MEASUREMENT MARKINGS

Enables fast and easy installation

Opportunity to flash more windows

HIGHLY CONFORMABLE AND FLEXIBLE

Accommodates settlement and shrinkage movement

Premium protection even in hard to work areas



PROVEN TRACK RECORD

Vycor® Plus flashing employs the same proven technology as **GRACE ICE & WATER SHIELD®** – the leader in roofing underlayments for over 35 years

Roll Width	4 in., 6 in., 9 in, 12 in., 18 in.
------------	--

Roll Length	75 ft
-------------	-------



VYCOR[®] Pro

WINDOW AND DOOR FLASHING

HIGH-PERFORMANCE PROTECTION FOR WINDOWS AND DOORS



Proprietary adhesive seals and protects details against moisture and air intrusion

Compatible with flexible PVC windows and leading sealant technologies

Wide application temperature range for year round versatility in any climate

VYCOR[®] Pro flashing tape, with its highly conformable film and butyl-modified adhesive technology, provides premium protection against water infiltration in all critical non-roof detail areas. **VYCOR[®] Pro** contains no asphalt and is compatible with flexible PVC window flanges and leading sealant technologies.



WHY VYCOR® Pro FLASHING TAPE?

NON-ASPHALTIC BUTYL-MODIFIED ADHESIVE

Compatible with flexible PVC window flanges and leading sealant technologies

Chemical compatibility concerns are eliminated

SEALS AROUND FASTENERS

Prevents water penetration to the substrate

Give clients peace of mind with premium protection

AGGRESSIVE BUTYL-MODIFIED ADHESIVE

Forms strong laps and bonds aggressively to the substrate, even in cold conditions

Versatility for use in all seasons

HIGHLY CONFORMABLE THIN MEMBRANE

Easily worked into tight details with minimal build-up of multiple layers

Premium protection even in hard to work areas

CONVENIENT MEASUREMENT MARKINGS

Makes preparation faster and easier

Save time — Save money



COMPLETE WEATHERIZATION SYSTEM

When used with VYCOR® enV-S™ weather resistive barriers

Membrane Thickness	14 Mils
--------------------	---------

Roll Width	4 in., 6 in., 9 in., 12 in.,
------------	------------------------------

Roll Length	75 ft
-------------	-------



Basement Water-proofing & Vapor Barriers

Maintain energy efficiency and improve indoor air quality, for a dry and leak free basement

BITUTHENE®25
FLORPRUFE®27



BITUTHENE®

WATERPROOFING MEMBRANE

WATERPROOFING FOR BASEMENT WALLS



Provides a continuous layer of waterproofing, protecting from leaks coming through cracks in the foundation

Protects against aggressive soils and ground water

Durable and easy to apply sheet

BITUTHENE® fully-adhered waterproofing membrane is applied to the outside of basement walls. Its cross-laminated film ensures a waterproof seal. Protect your project with **BITUTHENE®** waterproofing membrane for a durable and watertight below-grade solution.

***BITUTHENE®** is RSI's first choice in sheet waterproofing. **BITUTHENE®**'s high quality, ease of installation, and immediate availability make it a worry-free waterproofing application. Whether we are using it to waterproof a basement at the University of Colorado Recreation Center or as part of the Composite Waterproofing System at Denver International Airport, **BITUTHENE®** is an important component in our waterproofing arsenal and a vital first step in a building envelope system."*

— Chad Hinshaw, Project Manager, Restoration Specialists Inc



WHY BITUTHENE® WATERPROOFING MEMBRANE?

FULLY-ADHERED

Forms integral bond to substrate

Keeps basement dry and comfortable

FLEXIBLE

Accommodates minor settlement and shrinkage movement

Maintains waterproof seal

CROSS LAMINATED FILM

Dimensional stability, high tear strength, puncture and impact resistance

Highly durable material

RIPCORD® – SPLIT RELEASE ON DEMAND

Ease of membrane positioning in detailed areas

Robust protection in hard to install areas



**FROM THE
GLOBAL
LEADER IN
WATERPROOFING
TECHNOLOGIES
FOR OVER 50
YEARS**

Roll Length 66.7 ft

Roll Width 3 ft.

Roll Size 200 ft²

Roll Weight 83 lbs.



FLORPRUFE®

VAPOR BARRIER

PREMIUM VAPOR PROTECTION FOR BASEMENT FLOOR FINISHES



Helps keep basement areas dry & comfortable

Enables your client to finish the basement area with the floor covering of their choice

Protects the living space and increases its durability

FLORPRUFE® high performance vapor barrier is designed with our Advanced Bond Technology™, forming a unique seal to the underside of concrete floor slabs. **FLORPRUFE®** membrane protects expensive moisture sensitive flooring products from the effects of water vapor migrating upward through the slab and causing water damage.



WHY FLORPRUFE® VAPOR BARRIER?

POWERFUL SEAL TO THE UNDERSIDE OF CONCRETE SLAB

Provides fully-adhered protection, even if ground settlement occurs

Keeps basement dry and comfortable

LIGHTWEIGHT KICK-OUT ROLLS

Easy to apply

Saves time and labor

LOW VAPOR PERMEABILITY

Protects vapor sensitive flooring materials

Gives design flexibility on choice of flooring materials

Roll Length	115 ft	Roll Size	460 ft ²
Roll Width	4 ft.	Roll Weight	70 lbs.



As a worldwide leader in the construction products industry, GCP products are specified by architects and engineers and are used by contractors, ready mix, precast and block producers and cement manufacturers to enhance the durability, strength and appearance of structures found in many major construction projects.

gcpat.com | Customer Service: 1-866-333-3726

The information here is based on data and knowledge considered to be true and accurate, but without warranty. Our conditions of sale apply to all goods supplied by us. No statement, recommendation, or suggestion is intended for any use that would infringe any patent, copyright, or other third party right.

GCP, GRACE ICE & WATER SHIELD®, GRACE ULTRA™, GRACE SELECT™, TRI-FLEX®, VYCOR®, BITUTHENE® and FLORPRUFE® are trademarks, which may be registered in the United States and/or other countries, of GCP Applied Technologies Inc. This trademark list has been compiled using available published information as of the publication date and may not accurately reflect current trademark ownership or status.

© Copyright 2022 GCP Applied Technologies Inc. All rights reserved.

GCP Applied Technologies Inc., 2325 Lakeview Parkway, Suite 450, Alpharetta, GA 30009 USA.

In Canada, GCP Canada, Inc., 294 Clements Road, West, Ajax, Ontario, Canada L1S 3C6.

RE0100 WPS-002-0822 Residential Catalog/Brochure

