


OPTION: REPLACE DOUBLE CORNER POSTS WITH A SINGLE 4"x4" CORNER POST. SECURELY ATTACH TO DECK STRUCTURE AND CAP RAIL. CABLES MUST BE TERMINATED AT SINGLE POST. OFFSET DRILL HOLES AT LEAST 1/2" TO ALLOW INTERNAL CLEARANCE FOR CABLE END FITTINGS

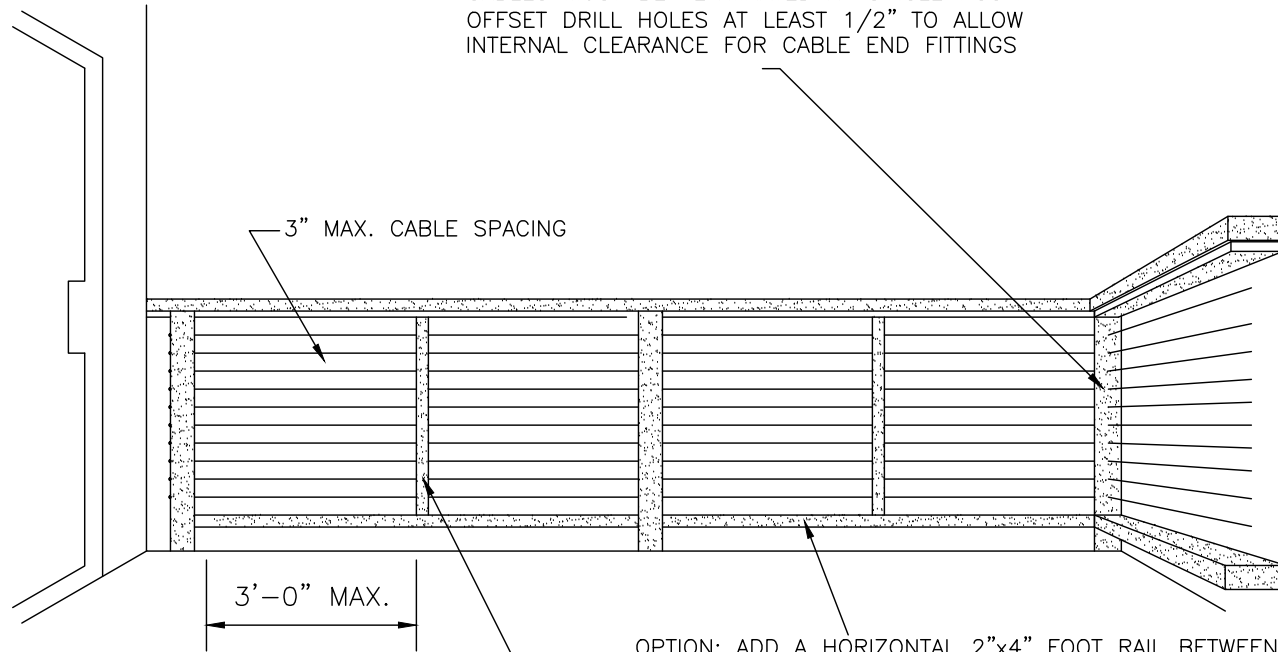

3" MAX. CABLE SPACING

3'-0" MAX.

MAINTAIN 3'-0" MAX. SPACING BETWEEN POSTS & VERTICAL SPACER PICKETS TO MINIMIZE CABLE DEFLECTION.

OPTION: ADD A HORIZONTAL 2"x4" FOOT RAIL BETWEEN POSTS. SPACE NO MORE THAN 4" ABOVE DECK SURFACE OR PER LOCAL CODE.

OPTION: REPLACE 4"x4" INTERMEDIATE POSTS WITH SLENDER VERTICAL SPACER PICKETS (1"x2", 2"x2", 2"x4" WOOD STRIPS; METAL BAR STOCK; OR EVEN COPPER WATER TUBING) SECURELY ATTACH TO CAP RAIL AND FOOT RAIL OR DECK STRUCTURE.

NOTE: BUILDING CODES VARY BY CITY & COUNTY. FOLLOWING THE INSTALLATION AND RAILING DESIGN INSTRUCTIONS AS DETAILED IN THIS DRAWING DOES NOT GUARANTEE CODE COMPLIANCE IN ALL AREAS. BEFORE STARTING THE PROJECT, CHECK WITH LOCAL REQUIREMENTS FOR USING AND INSTALLING CABLE RAILINGS.

CableRail Reference Drawing:
CABLE RAIL IN WOOD FRAMES WITH SINGLE CORNER POST

THIS DRAWING IS THE PROPERTY OF FEENEY INC. ANY REPRODUCTION OF THIS DOCUMENT WITHOUT THE EXPRESSED WRITTEN CONSENT OF FEENEY INC. IS STRICTLY PROHIBITED.

DATE:	03/31/17
PAGE:	1 of 1
REV:	B
BY:	MRJ
CHK:	BWA

feeney
makes it easy
 2603 Union St., Oakland, CA 94607
 P: 800-888-2418 F: 510-893-9484
 www.feeneyinc.com