




VAPOR-TEK[®] 440


Moisture Vapor Barrier Coating

100% SOLIDS, TWO-COMPONENT EPOXY CONCRETE COATING DESIGNED TO CONTROL MOISTURE VAPOR EMISSION RATES UP TO 20LB. / 24 HR / 1,000 SQ. FT. PRIOR TO THE APPLICATION OF HARDWOOD FLOORING, CARPET AND TILE.

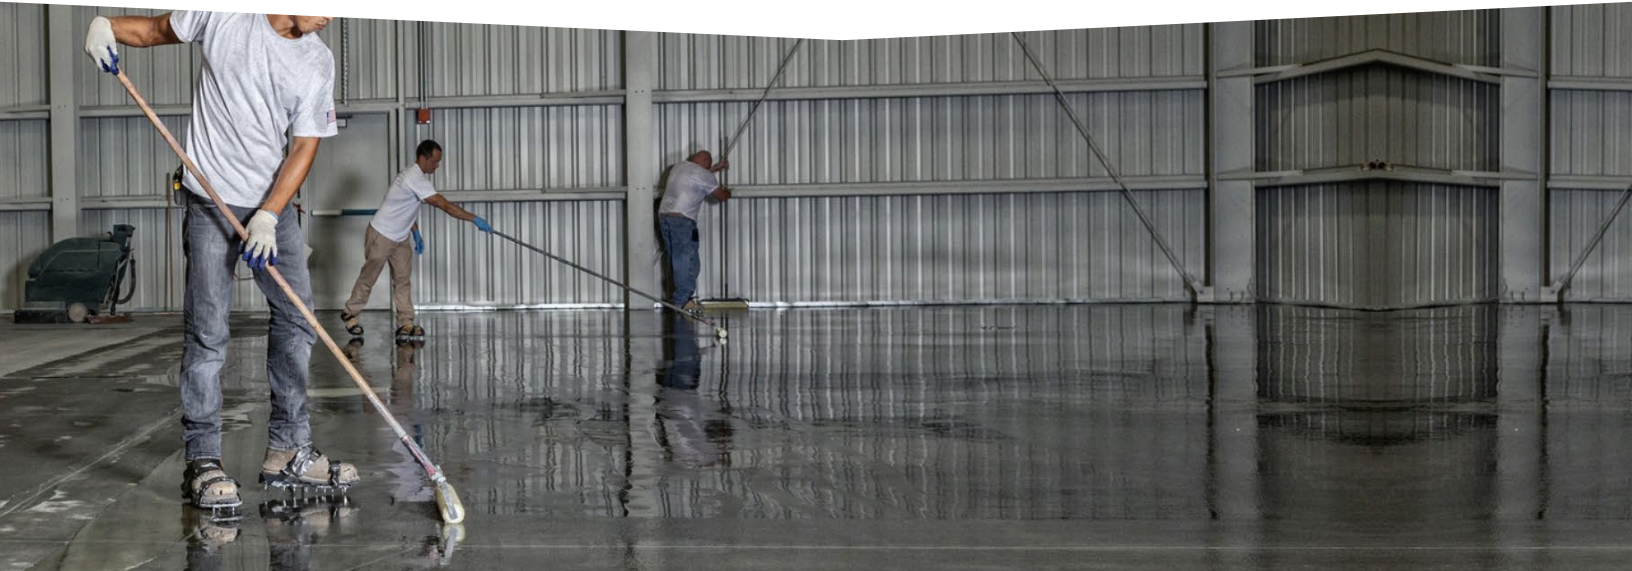

BENEFITS:

- / Waterproofs Concrete up to 20lbs. / 24hr / 1000 sq. ft.
- / Locks Out Moisture and Vapor
- / Ensures Protection of Moisture Sensitive Flooring
- / One Coat / Rapid Curing / Zero VOCs

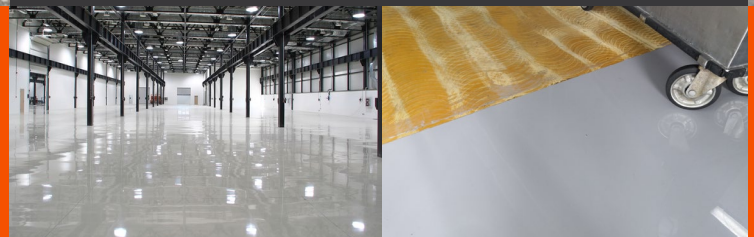

DESCRIPTION:

A revolutionary, 100% solids, two component epoxy concrete coating designed to control moisture vapor emission rates up to 20 lb / 24 hr / 1,000 ft, prior to the application of epoxy floor systems, vinyl, rubber, tile, cementitious overlays, terrazzo, wood, or carpet. Vapor-Tek 440 reduces the permeance of moisture vapor through concrete substrates to levels that are acceptable for the installation of resinous floor coatings. The high performance and quick installation features of this system make it an ideal solution.

DESIGNED FOR:

Basements, floors where moisture and vapor of porous concrete surfaces needs to be controlled.

Not intended for: Outdoor Surfaces

MEETS OR EXCEEDS:

ASTM F3010: Standard Practice for Two-Component Resin Based Membrane-Forming Moisture Mitigation Systems for Use Under Resilient Floor Coverings

SIZE(S):

1.5 Gallon (clear)

3 Gallon (clear)

15 Gallon (clear)

CASE PACK:

1 (Part A/B)

1 (Part A/B)

1 (Part A/B)

UPC (EA):

855849005286

N/A

N/A



**Blocks
Moisture**



**Gloss
Finish**



**1
Coat**




**No VOC
0 g/L**



**100 sq. ft.
per gallon**

VAPOR PERMEANCE PERFORMANCE:

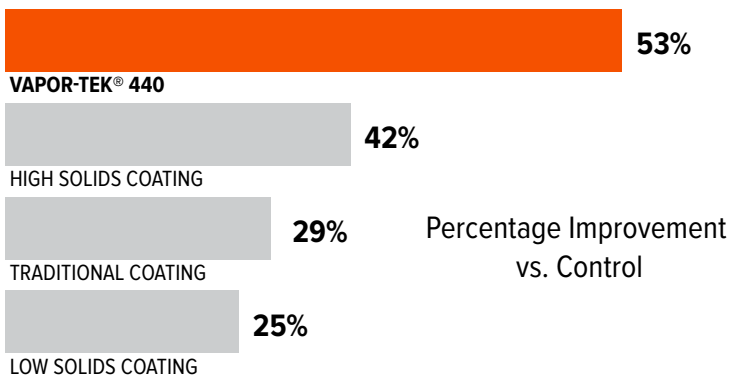

KreteTek Industries Inc.
Hudson, New Hampshire 03051
GHOSTSHIELD.COM // 1 (855) 573-8383