Introducing



THE ULTIMATE FASTENERS



STRUCTURAL WOOD SCREWS



TRIM HEAD SCREWS



FINISH HEAD SCREWS













STRUCTURAL LAG SCREW



STRUCTURAL HEX LAGS



FOR CABINETRY & MORE





NOVA & YUKON TER 2010-03 Technical Evaluation Report available at www.screw-products.com



MORE INSIDE!

- For Drywall & Cement Board
- Specialty Screws
- Bit Holders & Star Drive Bits
- Other Accessories



WOOD TO STEEL SCREWS

FOR DECKING

- Composite Deck Screws
- DeckLok & RailLok Brackets
- Deck2Wall Spacers
- And More!

WWW.SCREW-PRODUCTS.COM

Gig Harbor, WA 98332 Toll-Free 1-877-844-8880



Introducing CENII



THE ULTIMATE FASTENERS

TABLE OF CONTENTS

AXIS	*		AXIS™ General Interior Structural Wood Screw	1" to 6"	4
	*	WWW.	AXIS™ General Exterior Structural Wood Screw	3/4" to 8"	6
	*		AXIS™ Stainless Steel Structural Wood Screw	1" to 4"	8
EPIC*	(3)	200 HIIIIIIIIII	EPIC™ General Exterior Trim Screw	1-5/8" to 5"	10
			EPIC™ Stainless Steel Trim Screw	1-5/8" to 4"	12
PICO	• •		PICO™ General Exterior Finish Screw	1-5/8" to 3"	14
			PICO™ Stainless Steel Finish Screw	1-5/8" to 3"	16
AURA	*		AURA™ For Cabinetry & More! Exterior/Interior	1" to 3"	18
NOVA			NOVA™ General Exterior Structural Lag Screw	1" to 16"	20
YUKON			YUKON™ General Exterior Structural Hex Lag	4" to 14"	22
ROCO	*		ROCO™ Wood to Steel General Exterior	1-1/2" to 4-3/4"	26
			C-Deck Composite Deck Screws	2-3/4"	28
			Phillips Drywall Screws - Drill & Sharp Point	1-1/8" to 3"	31
	•		Coated Cement Board - Sharp & Drill Point	1-1/4" to 1-5/8"	32
			Tapcon Masonry Screws	1-3/4" to 3-1/4"	32


Decking Hardware Pg 29-30 Specialty Screws Pg 30-32 Accessories & More! Pg 33-34

- DeckLok® Lateral Anchor System
- RailLok® Railing & Fence Bracket
- D2W[™] Deck2Wall Spacers
- Gutter Screws
- Phillips Mod Truss Metal to Metal
- •
- WINBAG® Inflatable Reusable Shims
- Star Drive Bits & Bit Holders
- HOLDSaBIT Bit Holder

WWW.SCREW-PRODUCTS.COM

Gig Harbor, WA 98332 Toll-Free 1-877-844-8880



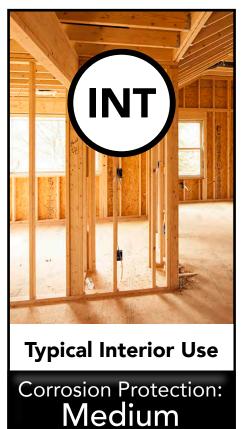

Typical heated, dry room environments with clean air (low or no condensation / minimal outdoor exposure) such as homes, shops, offices, schools, hotels, etc. Environmentally friendlier than any Yellow Zinc that contains Chromium 6.

ZYTECTM+



Compatible with most above ground pressure treated lumber. For ground contact treated lumber, areas within one mile of saltwater, near swimming pools, exposure to corrosive chemicals, or other areas where corrosion is more like to occur, use proper grade Stainless Steel.

- ZYTEC[™] GX
 ZYTEC[™] XT



Outdoor coastal areas, surfaces with salt exposure, shipyards, ground contact treated lumber, medium polluted industrial areas, chemical plants, etc.

- 316 STAINLESS STEEL
- STAINLESS STEEL *
- Our Gen II Products marked "Stainless Steel" are Austenitic Stainless Steel AISI 305 or better!

Always follow timber manufacturer's recommendations for fasteners!





THE ULTIMATE FASTENERS

INTERIOR

STRUCTURAL



Horizon Curve™

A slight curvature of the head for elegant, professional, architectural results. The Finish Ring underneath the head also provides a better finish by cutting the top fibers in the wood for an extra step in countersinking.



Turbine Ribs™

(patent pending) Turbine Ribs cut quickly into the wood, leaving a professional, clean finish with maximum wood contact. The cup shaped, countersinking head provides increased holding power and reduced risk of splitting.



Twin Blades™

(patent pending) This set of knurls cuts fast to dramatically reduce friction and heat on the shank, while reducing load on the drill. They also provide better performance by removing debris faster than a standard fastener's knurl.



Fast Start Tip

With sharp threads all the way to the tip, the fastener has an immediate grip for a fast start. The inset thread cut drastically reduces the splitting effect and minimizes the driving torque needed to engage the wood.

This advanced, General Purpose Structural Wood Screw is for typical interior, medium-corrosive environments. Use them on any size job or project from framing to small wood working!



Available in 1lb, 5lb and 1/4 Keg All Packaging Includes Drive Bit!

WWW.SCREW-PRODUCTS.COM

Gig Harbor, WA 98332 Toll-Free 1-877-844-8880





The AXIS™ Structural Wood Screw is the next step in fastener design. Every facet has been evaluated and improved (patents pending). Our extra sharp Fast Start Tip saves you time onsite and the Twin Blades outperform the competitor's knurls. The Turbine Ribs ensure an incredibly clean finish. Its cup shaped, countersinking head, provides unparalleled holding power and less risk of splitting the wood. The Horizon Curve Head has been architecturally engineered to leave an elegant finish.











TYPICAL INTERIOR USE


ZYTEC™+ Coating: Typical heated, dry room environments with clean air (low or no condensation/minimal outdoor exposure) such as homes, shops, offices, schools, hotels, etc. Environmentally friendlier than any Yellow Zinc that contains Chromium 6. Always follow timber manufacturer's recommendations for fasteners.

Common Applications

- Commercial & residential
- General indoor jobs
- Remodeling and repair
- Interior framing
- Trim work & Cabinetry
- Windows and doors
- Post and beam & much more!

Sizes Available: #8 x 1" to #10 x 6"

General I					
Type of	General Purpose Structural Wood				
М	Heat	Heat Treated, Hardened Steel			
С	oating	ZYTE	Стм +		
Head	d Style	Coun	tersinking	TX20 Star	Drive
Poin	t Type	Modi	fied Type '	17	
Constr	uction		#8	#9	#10
Head diamet	ter (inch	ר)	0.323	0.350	0.386
Minor thread	d diame	ter	0.106	0.122	0.136
Major thread	diame	ter	0.165	0.183	0.211
Shaft diamet	er		0.122	0.136	0.154
Drive Size	Drive Size			TX20	TX20
Product Range			Approx Count per 1lb		
Length	Thread		#8	#9	#10
1"	3/4"		253		
1-1/4"	7/8	3"	214		
1-1/2"	1		181		111
1-3/4"	1-1/	/8"	159		
2"	1-1/	/4"	146	112	85
2-1/2"	1-1/	/2"	118	92	70
2-3/4"	1-1/2"			83	
3"	1-1/2"			78	59
3-1/2"	2"				51
4"	2"				46
5"	2-1/	/2"			37
6"	2-1/2"				31







THE ULTIMATE FASTENERS

EXTERIOR

STRUCTURAL

Horizon Curve™

A slight curvature of the head for elegant, professional, architectural results. The Finish Ring underneath the head also provides a better finish by cutting the top fibers in the wood for an extra step in countersinking.

Turbine Ribs™

是一个人

(patent pending) Turbine Ribs cut quickly into the wood, leaving a professional, clean finish with maximum wood contact. The cup shaped, countersinking head provides increased holding power and reduced risk of splitting.

Twin Blades™

(patent pending) This set of knurls cuts fast to dramatically reduce friction and heat on the shank, while reducing load on the drill. They also provide better performance by removing debris faster than a standard fastener's knurl.

Fast Start Tip

With sharp threads all the way to the tip, the fastener has an immediate grip for a fast start. The inset thread cut drastically reduces the splitting effect and minimizes the driving torque needed to engage the wood.

This advanced, General Purpose Structural Wood Screw with ZYTEC™XT corrosion protection coating is for typical high-corrosive exterior and interior environments. Use them on any size job or project from framing to small wood working!



Available in 1lb, 5lb and 1/4 Keg All Packaging Includes Drive Bit!

WWW.SCREW-PRODUCTS.COM

Gig Harbor, WA 98332 Toll-Free 1-877-844-8880





The AXIS™ Structural Wood Screw is the next step in fastener design. Every facet has been evaluated and improved (patents pending). Our extra sharp Fast Start Tip saves you time onsite and the Twin Blades outperform the competitor's knurls. The Turbine Ribs ensure an incredibly clean finish. Its cup shaped, countersinking head, provides unparalleled holding power and less risk of splitting the wood. The Horizon Curve Head has been architecturally engineered to leave an elegant finish.













TYPICAL EXTERIOR USE

ZYTEC[™]**XT Coating:** For general outdoor use. Compatible with most above ground pressure treated lumber. For ground contact treated lumber, areas within one mile of saltwater, near swimming pools, exposure to corrosive chemicals, or other areas where corrosion is more like to occur, use proper grade Stainless Steel. Always follow timber manufacturer's recommendations for fasteners.

Common Applications

- Commercial & residential
- General indoor and outdoor jobs
- Decking, railing and fencing
- Roofing and siding
- Construction, remodeling and repair
- Framing, windows and doors
- Trim & Cabinetry
- And much more!

Sizes Available: #8 x 3/4" to #14 x 8"

General I	nfo						
Type of	Screw	Gene	General Purpose Structural Wood				
M	Material			l, Harde	ned Ste	el	
С	oating	ZYTE	С™ ХТ				
Head	d Style	Coun	itersinki	ng TX20)/30 Sta	r Drive	
Poin	t Type	Modi	fied Typ	e 17			
Constr	uction		#8	#9	#10	#14	
Head diamet	er (inch	1)	.323	.350	.386	.488	
Minor thread	l diame	ter	.106	.122	.136	.152	
Major thread	diame	ter	.165	.183	.211	.246	
Shaft diamet	er		.122	.136	.154	.173	
Drive Size			TX20	TX20	TX20	TX30	
Product	t Range	<u>;</u>	Approx Count per 1lb				
Length	Thre	ead	#8	#9	#10	#14	
3/4"	5/8	3"	326				
1"	3/4	4"	256	196			
1-1/4"	7/8	3"	219	164			
1-1/2"	1	"	183	141			
1-3/4"	1-1/		162				
2"	1-1/	/4"	144	112	85		
2-1/2"	1-1/	/2"		90	69		
2-3/4"	1-1/			78			
3"	1-1/	/2"		78	59		
3-1/2"	2	"			51		
4"	2"				45		
5"	2-1/2"				36	28	
6"	2-1/	/2"			30	24	
7"						20	
8"						18	



Introducing CEN II




THE ULTIMATE FASTENERS

STAINLESS STEEL

STRUCTURAL



STAINLESS STEEL



Horizon Curve™

A slight curvature of the head for elegant, professional, architectural results. The Finish Ring underneath the head also provides a better finish by cutting the top fibers in the wood for an extra step in countersinking.



Turbine Ribs™

(patent pending) Turbine Ribs cut quickly into the wood, leaving a professional, clean finish with maximum wood contact. The cup shaped, countersinking head provides increased holding power and reduced risk of splitting.



Twin Blades™

(patent pending) This set of knurls cuts fast to dramatically reduce friction and heat on the shank, while reducing load on the drill. They also provide better performance by removing debris faster than a standard fastener's knurl.



Fast Start Tip

With sharp threads all the way to the tip, the fastener has an immediate grip for a fast start. The inset thread cut drastically reduces the splitting effect and minimizes the driving torque needed to engage the wood.

This advanced, General Purpose Structural Wood Screw is for typical very high-corrosive environments. Great for any size job or project such as decks, docks, boardwalks, fencing, railings, pools, hot tubs and more!



Available in 1lb, 5lb and 1/4 Keg All Packaging Includes Drive Bit!

WWW.SCREW-PRODUCTS.COM

Gig Harbor, WA 98332 Toll-Free 1-877-844-8880







THE ULTIMATE FASTENERS

STAINLESS STEEL

STRUCTURAL

The AXIS™ Structural Wood Screw is the next step in fastener design. Every facet has been evaluated and improved (patents pending). Our extra sharp Fast Start Tip saves you time onsite and the Twin Blades outperform the competitor's knurls. The Turbine Ribs ensure an incredibly clean finish. Its cup shaped, countersinking head, provides unparalleled holding power and less risk of splitting the wood. The Horizon Curve Head has been architecturally engineered to leave an elegant finish.











TOUGH ENVIRONMENTS

Stainless Steel: Outdoor Coastal areas, surfaces with salt exposure, ground contact treated lumber, shipyards, medium polluted industrial areas, chemical plants, etc. Always follow timber manufacturer's recommendations for fasteners.

Common Applications

- Commercial & residential
- Decking and railing
- Fencing
- Siding & roofing
- · Remodeling and repair
- Framing
- Trim & Cabinetry
- Windows and doors
- Chlorinated areas
- Hot tubs & Swimming pools
- And much more!


Sizes Available: #8 x 1" to #10 x 4"

	General Info		
	Type of Screw	General Purpose Structural Wood	
	Material	Stainless Steel ¹ & 316 Stainless	
Head Style		Countersinking TX20 Star Drive	
	Point Type	Modified Type 17	
1.	Our Gen II Products marked "Stainless Steel" are		

1.	Our Gen II Products marked "Stainless Steel"	are
	Austenitic Stainless Steel AISI 305 or better!	

Const	ruction	#8	#9	#10
Head diame	ter (inch)	0.323	0.350	0.386
Minor thread	d diameter	0.106	0.122	0.136
Major thread	d diameter	0.165	0.183	0.211
Shaft diamet	ter	0.122	0.136	0.154
Drive Size		TX20	TX20	TX20
Produc	t Range	Appro	x Count p	er 1lb
Length Thread		#8	#9	#10

110000	t riange	Approx Godine per Tib				
Length	Thread	#8	#9	#10		
1"	Full Thread	252				
1-1/4"	7/8"	211				
1-1/2"	1"	178	146			
2"	1-1/4"	138	113			
2-1/2"	1-1/2"		87	70		
3"	1-1/2"		76	60		
3-1/2"	2"			51		
4"	2"			46		
AL A (IIII) 047 0: 11 0: 1						







THE ULTIMATE FASTENERS

EXTERIOR

TRIM HEAD SCREW

Advanced Trim Head

The Epic Trim Head is slightly larger in diameter than industry standards. This combined with the patent pending Turbine Ribs give maximum holding power while leaving a clean, professional finish.

Turbine Ribs™

(patent pending) Turbine Ribs cut quickly into the wood, leaving a professional, clean finish with maximum wood contact. The cup shaped, countersinking head provides increased holding power and reduced risk of splitting.

Twin Blades™

(patent pending) This set of knurls cuts fast to dramatically reduce friction and heat on the shank, while reducing load on the drill. They also provide better performance by removing debris faster than a standard fastener's knurl.

Fast Start Tip

With sharp threads all the way to the tip, the fastener has an immediate grip for a fast start. The inset thread cut drastically reduces the splitting effect and minimizes the driving torque needed to engage the wood.

This advanced, Trim Head Wood Screw with **ZYTEC™XT** corrosion protection coating is for typical high-corrosive exterior and interior environments. Great for any size job or project.



Available in 1lb, 5lb and 1/4 Keg All Packaging Includes Drive Bit!

WWW.SCREW-PRODUCTS.COM

Gig Harbor, WA 98332 Toll-Free 1-877-844-8880 THE ULTIMATE FASTENERS

(10)





The EPIC™ Trim Head Screw is designed to take wood screws to an entire new level (patent pending). Our extra sharp Fast Start Tip saves you time onsite and our Twin Blades outperform the competitor's knurls. The Turbine Ribs ensure an incredibly clean finish. Its cup shaped, countersinking head provides unparalleled holding power and less risk of splitting. The small trim head provides a clean, professional connection.












TYPICAL EXTERIOR USE

ZYTEC™XT Coating: For general outdoor use. Compatible with most above ground pressure treated lumber. For ground contact treated lumber, areas within one mile of saltwater, near swimming pools, exposure to corrosive chemicals, or other areas where corrosion is more like to occur, use proper grade **Stainless Steel.** Always follow timber manufacturer's recommendations for fasteners.

Common Applications

- Commercial & residential
- General indoor and outdoor jobs
- Trim & Cabinetry
- Interior and exterior framing
- Windows and doors
- Remodeling and repair
- And Much more!



General I	nfo		
Type of Screw Trir			Head Wood Screw
М	aterial	Heat	Treated, Hardened Steel
С	oating	ZYTE	C™ XT
Head	d Style	Coun	tersinking TX20 Star Drive
Poin	t Type	Modi	fied Type 17
Constr	uction		#9
Head diamet	ter (incl	n)	0.260
Minor thread	d diame	ter	0.122
Major thread	d diame	ter	0.183
Shaft diamet	er		0.136
Drive Size			TX20
Produc	t Range		Approx Count per 1lb
Length	Thre	ead	#9
1-5/8"	1	ıı	148
2"	1-1,	/4"	122
2-1/2"	1-1/2"		98
3"	1-1/2"		82
4"	2"		61
5"	2-1,	/2"	50
Also Available with White Painted Head			





11

Introducing CEN II



THE ULTIMATE FASTENERS

STAINLESS STEEL

TRIM HEAD SCREW

EPC

STAINLESS STEEL

Advanced Trim Head

The Epic Trim Head is slightly larger in diameter than industry standards. This combined with the patent pending Turbine Ribs give maximum holding power while leaving a clean, professional finish.

Turbine Ribs™

(patent pending) Turbine Ribs cut quickly into the wood, leaving a professional, clean finish with maximum wood contact. The cup shaped, countersinking head provides increased holding power and reduced risk of splitting.

Twin Blades™

(patent pending) This set of knurls cuts fast to dramatically reduce friction and heat on the shank, while reducing load on the drill. They also provide better performance by removing debris faster than a standard fastener's knurl.

Fast Start Tip

With sharp threads all the way to the tip, the fastener has an immediate grip for a fast start. The inset thread cut drastically reduces the splitting effect and minimizes the driving torque needed to engage the wood.

This advanced, Trim Head Wood Screw for typical very high-corrosive environments. Use them on any size job or project. Great for decks, docks, fencing and railings!



Available in 1lb, 5lb and 1/4 Keg All Packaging Includes Drive Bit!

WWW.SCREW-PRODUCTS.COM

Gig Harbor, WA 98332 Toll-Free 1-877-844-8880





The EPIC™ Trim Head Screw is designed to take wood screws to an entire new level (patent pending). Our extra sharp Fast Start Tip saves you time onsite and our Twin Blades outperform the competitor's knurls. The Turbine Ribs ensure an incredibly clean finish. Its cup shaped, countersinking head provides unparalleled holding power and less risk of splitting. The small trim head provides a clean, professional connection.











TOUGH ENVIRONMENTS

Stainless Steel: Outdoor Coastal areas, surfaces with salt exposure, ground contact treated lumber, shipyards, medium polluted industrial areas, chemical plants, etc. Always follow timber manufacturer's recommendations for fasteners.

Common Applications

- Commercial & residential
- General indoor and outdoor jobs
- Trim & Cabinetry
- Interior and exterior framing
- Windows and doors
- Remodeling and repair
- Chlorinated areas
- Hot tubs
- Swimming pools
- And Much more!


Sizes Available: #9 x 1-5/8" to #9 x 4"

	General Info			
Type of Screw		Trim Head Wood Screw		
	Material	Stainless Steel ¹ & 316 Stainless		
	Head Style	Countersinking TX20 Star Drive		
Point Type		Modified Type 17		
1.	Our Gen II Products marked "Stainless Steel" are Austenitic Stainless Steel AISI 305 or better!			

Construction	#9
Head diameter (inch)	0.260
Minor thread diameter	0.122
Major thread diameter	0.183
Shaft diameter	0.136
Drive Size	TX20

Produc	t Range	Approx Count per 1lb			
Length	Thread	#9			
1-5/8"	1"	148			
2"	1-1/4"	119			
2-1/2"	1-1/2"	92			
3"	1-1/2"	81			
4"	2"	60			
Also Available in 216 Stainless Steel					







Gig Harbor, WA 98332 Toll-Free 1-877-844-8880

13





THE ULTIMATE FASTENERS

EXTERIOR

FINISH HEAD SCREW

PICO

Tiny Finish Head

The tiny finishwork head has been specifically engineered to be almost invisible when installed without compromising strength of the head or screw. The head size fits with concealed mounting tools.

Reverse Threads

The reverse threads helps to pull down debris and works perfectly together with the small head size to create a clean finish.

Fast Start Tip

With sharp threads all the way to the tip, the fastener has an immediate grip for a fast start. The inset thread cut drastically reduces the splitting effect and minimizes the driving torque needed to engage the wood.

Also For Concealed Fastening

For jobs where concealing the fastener is important, we have engineered these screws to fit most concealed fastening tools.

This advanced, Finish Head Wood Screw with ZYTEC™GX corrosion protection coating is for typical high-corrosive exterior and interior environments. Great for any size job or project.




Available in 1lb, 5lb and 1/4 Keg All Packaging Includes Drive Bit!

WWW.SCREW-PRODUCTS.COM

Gig Harbor, WA 98332 Toll-Free 1-877-844-8880



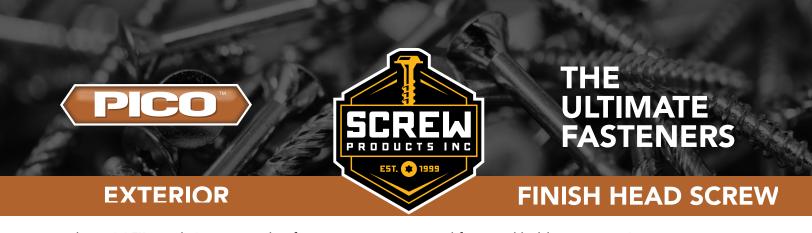

The PICO™ Finish Screw is a slim fastener, yet engineered for good holding power. Our extra sharp Fast Start Tip grips quickly into the wood and saves you time on site. The wide threads provides a strong connection while the reverse threads helps pull down fibers. The tiny head stays out of sight for a clean, professional finish. Fits with most concealed mounting tools.











TYPICAL EXTERIOR USE

ZYTEC™GX Coating: For general outdoor use. Compatible with most above ground pressure treated lumber. For ground contact treated lumber, areas within one mile of saltwater, near swimming pools, exposure to corrosive chemicals, or other areas where corrosion is more like to occur, use proper grade Stainless Steel. Always follow timber manufacturer's recommendations for fasteners.

Common Applications

- Commercial & residential
- Finish & trim work
- Hidden decking
- Interior and exterior framing
- Windows and doors
- Remodeling and repair
- Cabinetry
- And Much more!

General I	nfo			
Type of Screw Finish			n Head Wood Screw	
М	aterial	Heat	Treated, Hardened Steel	
С	oating	ZYTE	C™ GX	
Head	d Style	Coun	tersinking TX15 Star Drive	
Poin	t Type	Modi	fied Type 17	
Constr	uction		#8	
Head diamet	ter (incl	n)	0.201	
Minor thread	d diame	ter	0.106	
Major thread	diame	ter	0.165	
Shaft diamet	er		0.122	
Drive Size			TX15	
Produc	t Range	;	Approx Count per 1lb	
Length	Thre	ead	#8	
1-5/8"	1"		206	
2"	1-1/4"		164	
2-1/2"	1-1/2"		130	
3"	1-1/2"		109	
Also Available with White Painted Head				

Sizes Available: #8 x 1-5/8" to #8 x 3





Gig Harbor, WA 98332 Toll-Free 1-877-844-8880

Introducing



THE ULTIMATE FASTENERS

STAINLESS STEEL

FINISH HEAD SCREW

STAINLESS STEEL

Tiny Finish Head

The tiny finishwork head has been specifically engineered to be almost invisible when mounted without compromising strength of the head or screw. The head size fits with concealed mounting tools.

Reverse Threads

The reverse threads helps to pull down debris and works perfectly together with the small head size to create a clean finish.

Fast Start Tip

With sharp threads all the way to the tip, the fastener has an immediate grip for a fast start. The inset thread cut drastically reduces the splitting effect and minimizes the driving torque needed to engage the wood.

Also For Concealed Fastening

For jobs where concealing the fastener is important, we have engineered these screws to fit most concealed fastening tools.

This advanced, Finish Head Wood Screw is for typical very high-corrosive environments. Great for any size job or project.




Available in 1lb, 5lb and 1/4 Keg All Packaging Includes Drive Bit!

WWW.SCREW-PRODUCTS.COM

Gig Harbor, WA 98332 Toll-Free 1-877-844-8880



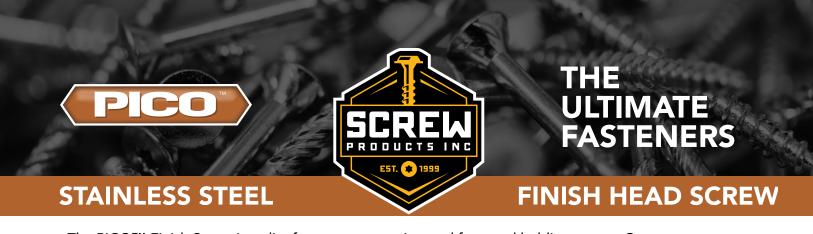

The PICO™ Finish Screw is a slim fastener, yet engineered for good holding power. Our extra sharp Fast Start Tip grips quickly into the wood and saves you time on site. The wide threads provides a strong connection while the reverse threads helps pull down fibers. The tiny head stays out of sight for a clean, professional finish. Fits with most concealed mounting tools.







TOUGH ENVIRONMENTS

Stainless Steel: Outdoor Coastal areas, surfaces with salt exposure, ground contact treated lumber, shipyards, medium polluted industrial areas, chemical plants, etc. Always follow timber manufacturer's recommendations for fasteners.

Common Applications

- Commercial & residential
- For tough environments
- Finish & trim work
- Hidden decking
- Interior and exterior framing
- Windows and doors
- Remodeling and repair
- Cabinetry
- Chlorinated areas
- Swimming pools & Hot Tubs
- And Much more!

General Info	
Type of Screw	Finish Head Wood Screw
Material	Stainless Steel ¹ & 316 Stainless
Head Style	Countersinking TX15 Star Drive
Point Type	Modified Type 17
4 0 6 11 5 1	


Sizes Available: #8 x 1-5/8" to #8 x 3

 Our Gen II Products marked "Stainless Steel" are Austenitic Stainless Steel AISI 305 or better!

Construction	#8
Head diameter (inch)	0.201
Minor thread diameter	0.106
Major thread diameter	0.165
Shaft diameter	0.122
Drive Size	TX15

Product Range		Approx Count per 1lb
Length	Thread	#8
1-5/8"	1"	187
2"	1-1/4"	158
2-1/2"	1-1/2"	119
3" 1-1/2"		104
Also Available in 316 Stainless Steel		





Introducing GEN II



THE ULTIMATE FASTENERS

CABINETS & MORE

INTERIOR/EXTERIOR

AURA

Aesthetic Design Mushroom Head

The aesthetic head design is shaped to compliment a clean finish in cabinetry, furniture, and more. The head is bold to show its architectural shape and decorates visible surfaces.

Graduated Shoulder

The bigger head increases holding power on the wood, while the graduated shoulder from head to shank ensures maximum strength for the fastener head.

Fast Start Tip

With sharp threads all the way to the tip, the fastener has an immediate grip for a fast start. The inset thread cut drastically reduces the splitting effect and minimizes the driving torque needed to engage the wood.

Excellent For Joinery Tools

Size #8 head has been designed to fit perfectly with most pocket joinery tools on the market. Excellent for cabinetry and more! Kreg Jig® compatible.

This advanced, Cabinetry (& more!) Wood
Screw with ZYTEC™GX corrosion
protection coating is for typical
high-corrosive exterior and interior environments.
Great for any size job or project.



Available in 1lb, 5lb and 1/4 Keg All Packaging Includes Drive Bit!

WWW.SCREW-PRODUCTS.COM

Gig Harbor, WA 98332 Toll-Free 1-877-844-8880





The AURA™ screw features an aesthetic design of the mushroom head shaped to fit in cabinetry, furniture and more. The large diameter head of the fastener ensures increased holding power. The head size on the #8 version has been designed to fit most pocket joinery tools on the market. Our extra sharp Fast Start Tip allows the screw to grip quickly into the wood providing easy installation.













TYPICAL EXTERIOR USE

ZYTEC™GX Coating: For general outdoor use. Compatible with most above ground pressure treated lumber. For ground contact treated lumber, areas within one mile of saltwater, near swimming pools, exposure to corrosive chemicals, or other areas where corrosion is more like to occur, use proper grade Stainless Steel. Always follow timber manufacturer's recommendations for fasteners.

Common Applications

- Commercial & residential
- General indoor and outdoor jobs
- Cabinetry
- #8 version is great for pocket joinery
- Vinyl & aluminum screens and doors
- Furniture manufacturing
- And Much more!

Sizes Available: #8 x 1" to #10 x 3"

General I	nfo			
Type of		General Purpose Wood		
M	aterial	Heat	Treated, Harde	ned Steel
С	oating	ZYTE	C™ GX	
Head	d Style	Mush	room TX20 Sta	r Drive
Poin	t Type	Modi	fied Type 17	
Constr	ruction		#8	#10
Head diamet	ter (incl	n)	0.362	0.476
Minor thread	d diame	ter	0.106	0.136
Major thread	d diame	ter	0.165	0.211
Shaft diameter			0.122	0.154
Drive Size			TX20	TX20
Product Range			Approx Co	unt per 1lb
Length	Thre	ead	#8	#10
1"	3/4	1"	215	126
1-1/4"	7/8	3"	187	108
1-1/2"	1	II	161	94
2"	1-1,	/4"	131	77
2-1/2"	1-1,	/2"	108	63
3"	1-1,	/2"		54
Also Available with White Painted Head				







Gig Harbor, WA 98332 Toll-Free 1-877-844-8880

Introducing



THE ULTIMATE FASTENERS

EXTERIOR

STRUCTURAL LAG



TER 2010-03 **Technical Evaluation Report** available now at www.screw-products.com



Horizon Curve™

A slight curvature of the head for elegant, professional, architectural results. Whether countersinking or surface mounting, the results are impressive!



Locking Wedges

The locking wedges help to mill and countersink the head into the wood for a clean finish. It also locks the head into place preventing unwanted future movement.



Twin Blades™

(patent pending) This set of knurls cuts fast to dramatically reduce friction and heat on the shank, while reducing load on the drill. They also provide better performance by removing debris faster than a standard fastener's knurl.



Fast Start Tip

With sharp threads all the way to the tip, the fastener has an immediate grip for a fast start. The inset thread cut drastically reduces the splitting effect and minimizes the driving torque needed to engage the wood.

The advanced, Heavy Duty Structural Lag Screw with **ZYTEC™GX** corrosion protection coating is for typical high-corrosive, exterior, and interior environments. Great for any size job or project.



Available in 50ct, 100ct and Bulk. All Packaging Includes Drive Bit!

WWW.SCREW-PRODUCTS.COM

Gig Harbor, WA 98332 Toll-Free 1-877-844-8880





THE ULTIMATE FASTENERS

STRUCTURAL LAG

The new NOVA™ Structural Lag is the superior lag screw for any of your projects. With a strong thread that ensures maximum withdrawal strength and extra sharp Fast Start Tip that easily grips and cuts its way through the wood, you will feel the power and quality of the NOVA. The Twin Blades ensures minimum friction on the shank and the Locking Wedges under the head countersink perfectly with maximum wood contact.









TYPICAL EXTERIOR USE

ZYTEC™GX Coating: For general outdoor use. Compatible with most above ground pressure treated lumber. For ground contact treated lumber, areas within one mile of saltwater, near swimming pools, exposure to corrosive chemicals, or other areas where corrosion is more like to occur, use proper grade Stainless Steel. Always follow timber manufacturer's recommendations for fasteners.

Common Applications

- Commercial & residential
- Timber
- Ledgers, posts & beams
- LVL (Laminated Veneer Lumber)
- SIP (Structural Insulated Panels)
- Rigid Foam Insulation
- Roofing
- Deck framing
- Docks
- And much more!



Sizes Available: #14 x 1" to #18 x 16"

General Purpose Wood
Heat Treated, Hardened Steel
ZYTEC™ GX
Low Profile TX30/40 Star Drive
Modified Type 17

Construction	#14	#16	#18
Head diameter (inch)	0.531"	0.630"	0.728"
Minor thread diameter	0.152"	0.177"	0.205"
Major thread diameter	0.246"	0.283"	0.315"
Shaft diameter	0.173"	0.205"	0.226"
Drive Size	TX30	TX30	TX40

Drive Size	TX30	TX30	TX40
Product Range	Tł	read Leng	th
Length	#14	#16	#18
1"	3/4"		
1-1/2"	1"		
2"	1-1/2"	1-1/2"	
2-1/2"	1-1/2"	1-1/2"	
3"	1-1/2"	1-1/2"	
3-3/8"			1-1/2"
3-1/2"		1-1/2"	
4"	2"	2"	2"
4-1/2"		2"	
5"	3"	3"	1-1/2"
6"	3"	3"	3"
6-3/4"			1-1/2"
7"			3-1/2"
8"			4"
10"			4"
12"			5"
14"			6"
16"			6"







Introducing CENII



THE ULTIMATE FASTENERS

STRUCTURAL LAG

#16x 5/16" HEX HEAD

YUKON

TER 2010-03
Technical Evaluation Report
available now at
www.screw-products.com

Small Washer Hex Head

Strong Structural Lag screw with 5/16" Hex Head for a powerful torque transmission and easy installation. The built-in washer underneath the head provides great holding power and works well for heavy duty applications.

Twin Blades™

(patent pending) This set of knurls cuts fast to dramatically reduce friction and heat on the shank, while reducing load on the drill. They also provide better performance by removing debris faster than a standard fastener's knurl.

Fast Start Tip

With sharp threads all the way to the tip, the fastener has an immediate grip for a fast start. The inset thread cut drastically reduces the splitting effect and minimizes the driving torque needed to engage the wood.

The advanced, Heavy Duty Structural Lag Screw with **ZYTEC™GX** corrosion protection coating for typical typical high-corrosive, exterior, and interior environments. Great for any size job or project.



Available in 50ct and 250ct.
All Packaging Includes Hex Driver.

WWW.SCREW-PRODUCTS.COM

Gig Harbor, WA 98332 Toll-Free 1-877-844-8880 THE ULTIMATE FASTENERS





THE ULTIMATE FASTENERS

STRUCTURAL LAG

#16x 5/16" HEX HEAD









TYPICAL EXTERIOR USE

ZYTEC™GX Coating: For general outdoor use. Compatible with most above ground pressure treated lumber. For ground contact treated lumber, areas within one mile of saltwater, near swimming pools, exposure to corrosive chemicals, or other areas where corrosion is more like to occur, use proper grade Stainless Steel. Always follow timber manufacturer's recommendations for fasteners.


Common Applications

- Commercial & residential
- Landscaping
- Heavy duty lumber
- LVL (Laminated Veneer Lumber)
- Deck framing
- Trusses
- Ledgers
- **Posts**
- Beams
- And Much more!

TER 2010-03 Technical Evaluation Report available now at www.screw-products.com

Sizes Available: #16 x 4" to #16 x 14"

General Info	
Type of Screw	Hex Head Structural Wood Screw
Material	Heat Treated, Hardened Steel
Coating	ZYTEC™ GX



Construction	#16
Head diameter (inch)	0.472"
Minor thread diameter	0.177"
Major thread diameter	0.283"
Shaft diameter	0.205"
Drive Size	5/16" HEX

2	07.10 1.1=21
Product Range	#16
Length	Thread
4"	2"
6"	2"
8"	2"
10"	2"
12"	2"
14"	2"







Introducing CENII



THE ULTIMATE FASTENERS

STRUCTURAL LAG

#18x 5/16" HEX HEAD

YUKON

TER 2010-03
Technical Evaluation Report
available now at
www.screw-products.com

Large Washer Hex Head

Strong Structural Lag screw with 5/16" Hex Head for a powerful torque transmission and easy installation. The built-in washer underneath the head provides great holding power and works well for heavy duty applications.

Twin Blades™

(patent pending) This set of knurls cuts fast to dramatically reduce friction and heat on the shank, while reducing load on the drill. They also provide better performance by removing debris faster than a standard fastener's knurl.

Fast Start Tip

With sharp threads all the way to the tip, the fastener has an immediate grip for a fast start. The inset thread cut drastically reduces the splitting effect and minimizes the driving torque needed to engage the wood.

The advanced, Heavy Duty Structural Lag Screw with **ZYTEC™GX** corrosion protection coating for typical typical high-corrosive, exterior, and interior environments. Great for any size job or project.



Available in 50ct and 250ct.
All Packaging Includes Hex Driver.

WWW.SCREW-PRODUCTS.COM

Gig Harbor, WA 98332 Toll-Free 1-877-844-8880 THE ULTIMATE FASTENERS

FOLLOW US

(i) (ii) (iii)
#SCREWPRODUCTSING





THE ULTIMATE FASTENERS

STRUCTURAL LAG

#18x 5/16" HEX HEAD









TYPICAL EXTERIOR USE

ZYTEC™GX Coating: For general outdoor use. Compatible with most above ground pressure treated lumber. For ground contact treated lumber, areas within one mile of saltwater, near swimming pools, exposure to corrosive chemicals, or other areas where corrosion is more like to occur, use proper grade Stainless Steel. Always follow timber manufacturer's recommendations for fasteners.

Common Applications

- Commercial & residential
- Landscaping Timbers
- Heavy duty lumber
- LVL (Laminated Veneer Lumber)
- Deck framing
- Ledgers
- Posts
- Beams
- And Much more!

TER 2010-03 Technical Evaluation Report available now at www.screw-products.com

Sizes Available: #18 x 4" to #18 x 11"

General Info	
Type of Screw	Hex Head Structural Wood Screw
Material	Heat Treated, Hardened Steel
Coating	ZYTEC™ GX
Head Style	5/16" Hex Head
Point Type	Modified Type 17
Construction	#18

, , , , , , , , , , , , , , , , , , ,	71
Construction	#18
Head diameter (inch)	0.630"
Minor thread diameter	0.205"
Major thread diameter	0.315"
Shaft diameter	0.226"
Drive Size	5/16" HEX

Drive Size	3/10 HEA		
Product Range	#18		
Length	Thread		
4"	2"		
5"	2-3/4"		
6"	2-3/4"		
7"	2-3/4"		
9"	2-3/4"		
11"	2-3/4"		









Introducing CENII



THE ULTIMATE FASTENERS

EXTERIOR

WOOD TO STEEL

ROCO

Horizon Curve™

A slight curvature of the head for elegant, professional, architectural results. The Finish Ring underneath the head also provides a better finish by cutting the top fibers in the wood for an extra step in countersinking.

Turbine Ribs™

(patent pending) Turbine Ribs cut quickly into the wood, leaving a professional, clean finish with maximum wood contact. The cup shaped, countersinking head provides increased holding power and reduced risk of splitting.

Unique Wing Design

The unique wing design is engineered to mill an oversize hole in the wood without breaking. As soon as the wings reach the steel, they easily break off, allowing the threads to tap into the steel base.

Superior Drill Point

The drill point has been specifically engineered to penetrate the steel as fast as possible. The angle and shape of the point makes it possible to remove steel chips fast and efficiently to enhance penetration.

This advanced, Wood to Steel Screw with **ZYTEC™GX** corrosion protection coating is for typical high-corrosive, exterior, and interior environments. Great for any size job or project.



Available in 1lb, 5lb and 1/4 Keg All Packaging Includes Drive Bit!

WWW.SCREW-PRODUCTS.COM


Gig Harbor, WA 98332 Toll-Free 1-877-844-8880





The ROCO™ Wood to Steel screw is specifically designed for increased holding power and an incredibly clean finish. When engaging the wood, the screw effortlessly drills through the wood while the wings mill an oversized hole. When the screw engages the steel base, the oversized hole prevents threads from engaging the wood, lifting wood and steel apart (jacking). The specially engineered drill point cuts fast through the steel and the threads firmly clamp the wood and steel together.











TYPICAL EXTERIOR USE

ZYTEC™GX Coating: For general outdoor use. Compatible with most above ground pressure treated lumber. For ground contact treated lumber, areas within one mile of saltwater, near swimming pools, exposure to corrosive chemicals, or other areas where corrosion is more like to occur, use proper grade Stainless Steel.

Common Applications


- Commercial & residential
- Wood to steel
- Truck & Trailer beds
- Wood rails on steel posts
- And Much more!

	_	-		
General Info				
Type of Screw	Wood	d to Steel		
Material	Heat Treated, Hardened Steel			
Coating	ZYTEC™ GX			
Head Style	Countersinking TX20/30 Star Drive			
Point Type	Drill I	Point		
Construction		#10	#12	#14
Head diameter		0.350"	0.386"	0.488"
Minor thread diame	0.138"	0.161"	0.192"	
Major thread diameter		0.186"	0.212"	0.246"
Shaft diameter		Full Thead	0.173"	0.203"
Drive Size		TX20	TX20	TX30

Sizes Available: #10 x 1-1/2" to #14 x3-3/4"

Pro	duct Range	Approx	(Count	per 1lb	
Length	Thread Drill Pt.		#10	#12	#14
10 x 1-1/2"	0.88"	#3	130		
12 x 2"	1.36"	#3		74	
12 x 2-1/2"	1.71"	#3		57	
14 x 2-3/4"	1.61"	#4			38
14 x 3-3/4"	1.61"				28

	Drill Ca	apacity	Wood Thickness
#10 Drill Point #3	Min	Max	Max
10 X 1-1/2"	0.059"	0.217"	0.87"
#12 Drill Point #3			
12 X 2"	0.059"	0.236"	1.30"
12 X 2-1/2"	0.059"	0.236"	1.89"
#14 Drill Point #4			
14 X 2-3/4"	0.138"	0.315"	1.89"
14 X 3-3/4"	0.138"	0.315"	2.87"





THE ULTIMATE FASTENERS

COMPOSITE DECK

C-DECK)



.26" Head Diameter

TREX® Approved!

The Ultimate Composite Deck Screw! Available in ACQ Compatible Coated and 305 Stainless Steel. For use with wood, composite, PVC and other plastic materials. Our e-coat screws are available in 23 colors that will match most common deck colors on the market and has shown over 1000 hours of resistance in salt spray tests! Our C-deck is specially designed to eliminate the mushrooming that can occur in composite materials.

	-	
Coverage Chart	Decking	16" centers
1750 ct	5 ½"	500 sq ft
350 ct	5 ½"	100 sq ft
75ct	5 ½"	20 sq ft

							- 1
	Coated S	teel		30	<u> Stainless</u>	Steel	
	ltem Number	Net Wt*	Drive Size		Item Number	Drive Size	Net Wt*
Unpainted				Unpainted	SSCD234	TX20	22.3 lbs
Cedar	CD234TTC	19.3 lbs	TX20	Cedar	SSCD234TTC	TX20	22.2 lbs
Desert Bronze	CD234DB	19.3 lbs	TX20	Desert Bronze	SSCD234DB	TX20	22.2 lbs
Fire Pit	CD234FP	19.3 lbs	TX20	Fire Pit	SSCD234FP	TX20	22.2 lbs
Flint	CD234FT	19.3 lbs	TX20	Flint	SSCD234FT	TX20	22.2 lbs
Gravel Path	CD234GP	19.3 lbs	TX20	Gravel Path	SSCD234GP	TX20	22.2 lbs
Madeira	CD234M	19.3 lbs	TX20	Gray	SSCD234TTG	TX20	22.2 lbs
Rope Swing	CD234RS	19.3 lbs	TX20	Madeira	SSCD234M	TX20	22.2 lbs
Saddle	CD234S	19.3 lbs	TX20	Rope Swing	SSCD234RS	TX20	22.2 lbs
Sandridge	CD234SR	19.3 lbs	TX20	Saddle	SSCD234S	TX20	22.2 lbs
Teak	CD234TK	19.3 lbs	TX20	Sandridge	SSCD234SR	TX20	22.2 lbs
Tree House	CD234TH	19.3 lbs	TX20	Teak	SSCD234TK	TX20	22.2 lbs
Vintage Lantern	CD234VL	19.3 lbs	TX20	Tree House	SSCD234TH	TX20	22.2 lbs
Winchester Grey	CD234WG	19.3 lbs	TX20	Vintage Lantern	SSCD234VL	TX20	22.2 lbs
Woodland Brown	CD234WB	19.3 lbs	TX20	Winchester Grey	SSCD234WG	TX20	22.2 lbs
Walnut	CD234WN	19.3 lbs	TX20	Woodland Brown	SSCD234WB	TX20	22.2 lbs
Gray	CD234TTG	19.3 lbs	TX20	Walnut	SSCD234WN	TX20	22.2 lbs
Mountain Cedar	CD234MC	19.3 lbs	TX20				
Pebble Grey	CD234PG	19.3 lbs	TX20				
Redwood	CD234RW	19.3 lbs	TX20				
River Rock	CD234RR	19.3 lbs	TX20				
Rosewood	CD234ROW	19.3 lbs	TX20				
Rustic Bark	CD234RB	19.3 lbs	TX20				
White	CD234WH	19.3 lbs	TX20				

WWW.SCREW-PRODUCTS.COM

Gig Harbor, WA 98332 Toll-Free 1-877-844-8880







DeckLok® Advanced Lateral Anchor System

DeckLok® – The Original Lateral Anchor System – is revolutionizing the decking industry. The patented DeckLok system will provide a bolted connection at all critical structural locations of your deck. A single pair of DeckLok brackets will provide 4000 lbs of pull out resistance. DeckLok will also increase rail post connections by up to 500%. Great for the deck-to-ledger connection, stair stringer, rail post and more. You NEED DeckLok to meet code! See screw-products.com for instructions and video.

Item Number	Description	Net Wt
DL316SS	316 Stainless Steel Lateral Anchor	0.9 lbs
DLHDG	Hot Dip Galvanized Lateral Anchor	0.9 lbs









- · For use with lumber or engineered flooring systems.
- Use with standard 1/2" hot-dipped galvanized or SS bolts.
- Code compliant hot-dipped galvanized or 316 stainless steel.
- Easy to install on existing structures or new construction
- One pair of DeckLok lateral anchors provides up to 4,000 lbs. of pullout resistance.
- DeckLok® is one of the most cost effective ways to consistently build a safe and secure deck and guardrail system.

Made In The USA!



2114

RailLok® Railing & Fence Section Connection


RailLok® is used to connect railing and fence sections to the rail post. Attach the brackets to the rail post using included screws and then slip pre-assembled railing or fence sections into the brackets and screw them in place. The RailLok brackets provide a strong, reliable fence section to post connection. The brackets are built to outlast the service life of the railing and fence sections.

Item Number	Description	Net Wt
RLBLK (also available in 4 Packs)	Black RailLok Bracket (Includes 5 Star Drive Screws)	0.2 lbs
RLWHT (also available in 4 Packs)	White RailLok Bracket (Includes 5 Star Drive Screws)	0.2 lbs
RL316SS (also available in 4 Packs)	316 Stainless RailLok Bracket (Includes 5 Star Drive Screws)	0.2 lbs





The Ultimate Concealed Deck Clip System



The Ultimate Concealed Deck Clip System! Milled with a marine grade aluminum clip and paired with a star drive black coated 305 stainless steel screw. Our clip requires no drilling or glue and is the easiest on the market to install! The aluminum clip holds decks more effectively than plastic clips and it's literally out of sight!



- Holds deck more effectively than plastic clips
- Black marine grade aluminum clip
- Includes black stainless steel star drive screws
- No drilling. No glue. No hassle.
- ★ Excellent for Rain Screens



Each unit contains:

- (175) Clips
- (175) 2-1/4" Star Drive Screws
- (10) 2-1/4" starter & finisher screws
- Hard Wood Plugs
- (1) TX20x2 Drive Bit
- Instructions

When using 5-1/2" wide decking, each jar will install 100 square feet of decking on 16" centers, or 150 square feet on 24" centers.

Item Number	Description	Net Wt	Package
DC175	Deck Clip System	3.3 lbs	1 Pack
DCPlugs	Package of 50ct Hole Plugs	.1 lbs	1 Pack

D2W™ Deck2Wall Spacers



Deck2Wall Spacers vs Washers

Designed to easily and efficiently provide airspace between buildings and deck ledgers, stair stringers, shade structures, railing posts, fence posts, and more to help prevent rot. Deck2Wall Spacers are easy to install. Simply fasten the spacer to the ledger with properly sized screws or nails through the attachment holes prior to bolting the ledger to the structure. The large diameter provides greater bearing surface than standard washers.

Item #	Description	Net Wt (10)
D2W58	Deck2Wall Spacer 2 1/2"	0.1 lbs
D2W58-10PK	(10) Deck2Wall Spacer 2 1/2"	1 lbs
D2W58-100	(100) Deck2Wall Spacer 2 1/2"	6.8 lbs
D2W38	Deck2Wall Spacers 2"	0.1 lbs
D2W38-10PK	(10) Deck2Wall Spacers 2"	1 lbs
D2W38-100	(100) Deck2Wall Spacers 2"	4 lbs





Made In The USA!

7" Gutter Screws, Ceramic Coated Star Drive



Includes Drive Bit! .425" Head Diameter



Gutter Screw Ceramic Coated Star Drive Screws in brown or white finish, #14 x 7". Includes TX30 bit. Conveniently packed in a reusable 250 piece pail, 50ct box and individually. Includes driver bit. Treated lumber compatible.

Item Number	Size	Drive	Net Wt*	Carton Qty	Jar Qty	Other Qty	
GTR147B Brown	#14 x 7"	T30	13.9 lbs	250	50	Each	
GTR147W White	#14 x 7"	T30	13.9 lbs	250	50	Each	

WWW.SCREW-PRODUCTS.COM

Gig Harbor, WA 98332 Toll-Free 1-877-844-8880





M2M Metal To Metal Screws



Includes Drive Bit!



The Ultimate Metal to Metal Screw! Our M2M Metal to Metal screw is the perfect option for getting through that heavy gauge steel! Great for metal joists and any job where metal to metal joinery is needed! It's advanced Tek, quadrex drive & superior strength make this screw a sure win! Use a #2 square. 16 threads per inch. • # 3 Point • Drilling capacity 0.110 (12 gauge) - 0.179 (7 gauge) • Application: low profile design provides added clearance for standing seam roof or a concealed fastener panel system • Suggested Tool: Screwgun (1800-2500 RPM) with clutch depth sensitive nose piece.

Item Number	Size	Drive	Net Wt*	Carton Qty	Lge Jar Qty	Med Jar Qty	Sml Jar Qty	Head Diam.
M2MQC-101634	10-16 x 3/4"	#2 Sq	47.4 lbs	7500	1000	500	100	.45"

Phillips Drive Modified Truss Head K-Lath Screws



Includes Drive Bit!



Our new self-drilling Modified Truss Head screws are for metal to metal applications. They feature a Phillips Drive, Zinc plating for corrosion resistance, a low profile modified truss head, and include a #2 Phillips Bit. Available in 20lb Bulk Pails and 1lb & 5lb Jars.

Item Number	Size	Drive	Net Wt*	Carton Qty	5lb Jar Qty	1lb Jar Qty
MT-0812D	8 X 1/2"	#2	20lbs	6060	1515	303
MT-0834D	8 X 3/4"	#2	20lbs	4444	1111	222
MT-08114D	8 X 1-1/4"	#2	20lbs	3226	806	161

Phillips Bugle Head Drywall Screws



.32" Head Diameter

Easy Drywall Installation!



>	Fine Thread Sharp Point
_	Fine Thread Drill Point
10	

Coarse Thread Sharp Point

Our drywall screws have a bugle head to prevent tearing, a phosphate coating to help resist corrosion, and a phillips drive recess. They are excellent for wall board, drywall, plaster board, sheet rock, gypsum board, and other materials.

Item Number	Size	50lb Box Qty	Bulk Pail Weight	Bulk Pail Qty	20lb Pail Qty	5lb Jar Qty	1lb Jar Qty
DW-6118F	6 X 1-1/8"	13,800	36.2 lbs	10,000	5,520	1,380	276
DW-6114C	6 X 1-1/4"	12,900	31.0 lbs	8,000	5,160	1,290	258
DW-6158C	6 X 1-5/8"	10,050	27.4 lbs	5,500	4,020	1,005	201
DW-8200C	8 X 2"	6,750	25.9 lbs	3,500	2,700	675	135
DW-8212C	8 X 2-1/2"	5,300	23.6 lbs	2,500	2,120	530	106
DW-8300C	8 X 3"	4,450	28.1 lbs	2,000	1,780	445	89
Drill Point							
DW-06114D	6 X 1-1/4"				5,010	1,244	250
DW-06158D	6 X 1-5/8"				40,37	992	200
DW-08258D	8 X 2-5/8"				1,947	486	98

WWW.SCREW-PRODUCTS.COM

Gig Harbor, WA 98332 Toll-Free 1-877-844-8880





Ceramic Coated Star Drive Cement Board Screws





Cement Board Ceramic Coated Star Drive Screws. Includes TX25 bit and conveniently packed in reusable containers. Deep sharp threads with a sharp point. Includes driver bit. Great for use with all cement boards. Treated lumber compatible.

ltem Number	Size	Drive Size	Net Wt*	Carton Qty	5lb Jar Qty	1lb Jar Qty	
CB114S (Sharp Point)	#8 x 1-1/4"	T25	30.9 lbs	5,000	795	159	
CB158S (Sharp Point)	#8 x 1-5/8"	T25	30.8 lbs	4,000	650	130	
CB114D (Drill Point)	#8 x 1-1/4"	T25	29.6 lbs	5,000	882	177	
CB158D (Drill Point)	#8 x 1-5/8"	T25	28.5 lbs	4,000	709	144	

Tapcon Masonry Screws (Phillips or Slotted Hex Head)



3/16" Screw Head Diameter .35" 1/4" Screw Head Diameter .454"



		Made In The USA!
	Removeable	Drill Bit Included
- John - J		
Requires Less	Blue Climaseal	Deen Wide Sharn Threads

Coating

Torque

Deep, Wide Snarp Inreads
Maximum Holding Power

Tapcon Masonry Phillips and Slotted Hex Head Screws are milled with a Blue Climaseal ® Coating for longer life. Fast and easy installation, removable, and the Advanced Threadform Technology requires less torque resulting in less end user fatigue. Great for securing all applications to concrete.

Size	Drive	Net Wt*		Carton
3/16" x 1-3/4"	Phillips	0.9 lbs	(includes Drill Bit)	100
3/16" x 2-1/4"	Phillips	1.2 lbs	(includes Drill Bit)	100
3/16" x 3-1/4"	Phillips	1.7 lbs	(includes Drill Bit)	100
1/4" x 3-1/4"	Phillips	2.8 lbs	(includes Drill Bit)	100
3/16" x 1-3/4"	Slotted Hex	0.9 lbs	(includes Drill Bit)	100
3/16" x 2-1/4"	Slotted Hex	1.2 lbs	(includes Drill Bit)	100
3/16" x 3-1/4"	Slotted Hex	1.7 lbs	(includes Drill Bit)	100
	3/16" x 1-3/4" 3/16" x 2-1/4" 3/16" x 3-1/4" 1/4" x 3-1/4" 3/16" x 1-3/4" 3/16" x 2-1/4"	3/16" x 1-3/4" Phillips 3/16" x 2-1/4" Phillips 3/16" x 3-1/4" Phillips 1/4" x 3-1/4" Phillips 3/16" x 1-3/4" Slotted Hex 3/16" x 2-1/4" Slotted Hex	3/16" x 1-3/4" Phillips 0.9 lbs 3/16" x 2-1/4" Phillips 1.2 lbs 3/16" x 3-1/4" Phillips 1.7 lbs 1/4" x 3-1/4" Phillips 2.8 lbs 3/16" x 1-3/4" Slotted Hex 0.9 lbs 3/16" x 2-1/4" Slotted Hex 1.2 lbs	3/16" x 1-3/4" Phillips 0.9 lbs (includes Drill Bit) 3/16" x 2-1/4" Phillips 1.2 lbs (includes Drill Bit) 3/16" x 3-1/4" Phillips 1.7 lbs (includes Drill Bit) 1/4" x 3-1/4" Phillips 2.8 lbs (includes Drill Bit) 3/16" x 1-3/4" Slotted Hex 0.9 lbs (includes Drill Bit) 3/16" x 2-1/4" Slotted Hex 1.2 lbs (includes Drill Bit)



WINBAG® Inflatable Reusable Shims

Announcing a MUST for every toolbox!

1ES 2016 NEW AWARD WINNING TOOL

The WINBAG® is a very powerful hand operated inflatable air shim made of fiber reinforced material that will save you countless hours on the jobsite. It is designed to provide a maximum pressure of up to 300 lbs. and can be used in conjunction with shims and wedges in a wide variety of applications.

The WINBAG® gives the user infinite adjusting possibilities; save time installing windows, positioning heavy doors and leveling furniture, kitchen cabinets and household appliances just to name a few practical uses.















#17801 5pc Stingray



Counter Display

10% off orders of 100 pcs or more on WINBAG							
Item #	Item Description	Minimum Order Qty					
17801	STINGRAY - Single Stingray with 5 WINBAGS	Carton of 5 Stingrays					
15730	WINBAG - Single	20 WINBAGS					
16054	Available Upon Request WINBAG - Free Counter Display Unit with minimum purchase of 20 (Single) WINBAGS						
15769	15769 Available Upon Request WINBAG - Free Tower Display Unit with minimum purchase of 50 (Single) WINBAGS						

Maximize Your Potential! One carton of 5 Stingrays gives you the opportunity to hang a set in five different areas of your store!

- Cabinetry
- Doors
- Windows
- Appliances
- Levels
- Contractor Desk
- Shims
- Tools
- And More!



	Star Drive Bits & Bit Holders								
Drive	1" (25)	2" (25)	1" (100)	2" (100)	2-3/4" (10)	3-1/2" (10)	6" (10)	1" and 2" Bits Available In 100ct Jars!	
TX10	•	•	•	•	Н	igh Quality	,		
TX15	•	•	•	•	Long	g Lasting B	its!	1" and 2" Bits Available In 100ct Jars!	
TX20	•	•	•	•	•	•	•	2"	
TX25	•	•	•	•	•	•	•	2-3/4"	
TX30	•	•	•	•				3-1/2" 6"	
TX40	•	•	•	•					
2PMBH2		C-Ring 2 pe For 1" Bits	-	gnetic Bit I	Holder 2-1/3	3"		×	
2PMBH6		C-Ring 2 po For 1" Bits	-	gnetic Bit I	Holder 6"		6		
SS1PME		C-Ring 1 po For 1" Bits	-	gnetic Bit I	Holder		•		
QR213		Quick Rele	ase Magı	netic Bit H	older 2-1/3'	'			
SPRMBH	1	SuperMag	Magnetic	: Bit Holde	r		•		

HOLDSaBIT



Introducing the HOLDSaBIT! Simply the easiest and best way to hold multiple insert drill bit driver tips on your cordless drill or impact. It goes on and off in seconds and holds up to 16 - 1" bit drivers, as well as 1000's of combinations of bits. The HOLDSaBIT slips on a cordless drill or impact in seconds, providing channels that hold all the tips you need for your projects. Made of a proprietary blend which provides strength & holding power at the same time. UV rated for outdoor use. Fits all full sized cordless drill and drivers.



Here are a few things you can place in your HOLDSaBIT:


- Bits Star, Torx, Square, Phillips, Straight - From 1" to 4"
- Hex shank drill bits Nut drivers Pencils/Pens
- Magnetic tip holders, and many, more tools



Item Number	Description	
HAB8	HOLDSaBIT With 8 bits	Included Bits in HAB8:
HAB815	15 ct Jar of HOLDSaBIT With 8 bits	• (1) 2" TX10 • (1) 2" TX15 • (2) 2" TX20 • (2) 2" TX25
HAB	HOLDSaBIT Only	• (1) 2" TX30 • (1) 2" TX40
HAB15	15 ct Jar of HOLDSaBIT Only	









Example 4ft x 6ft Standalone Set



Example 8ft x 7ft Standalone Set

Make An Impact!

We offer custom tailored sets to your store's customers and potential! Whether you are by the Ocean Shores or inland, we'll work with you to put together the set that's right for you.

From fastener type specific to our full line of fasteners, hardware and accessories; we'll help you put together an attention getting set that makes it easy for your customers to find what they need quickly.

Speak with your Screw Products, Inc. Representative for more information!

